



www.gillathletics.com
800-637-3090

ALUMINUM FOOTBALL GOALS PLATE MOUNTED SPECIFICATIONS

Gill Athletics football goal posts are available in a variety of configurations. All aluminum goals are constructed of 6 5/8" diameter aluminum offset poles and crossbars with 4" diameter aluminum uprights. The durable powder coat finish is available in either white or optic yellow.

Each goal is designed for easy leveling of the crossbar and uprights. Goals with 8ft offsets allow a soccer goal to fit underneath the crossbar.


Football goals are sold in pairs. Plate mounting kits (F35550) are sold separately.

Offset Pole: 6" Sch 40 Aluminum Pipe (6.625" OD) 6063-T52

Crossbar: 6" Sch 40 Aluminum Pipe (6.625" OD) 6061-T6

Upright: 4"OD x 1/8" wall Aluminum Tube, 6061-T6511

Note: Local soil conditions will determine actual size of concrete foundations.

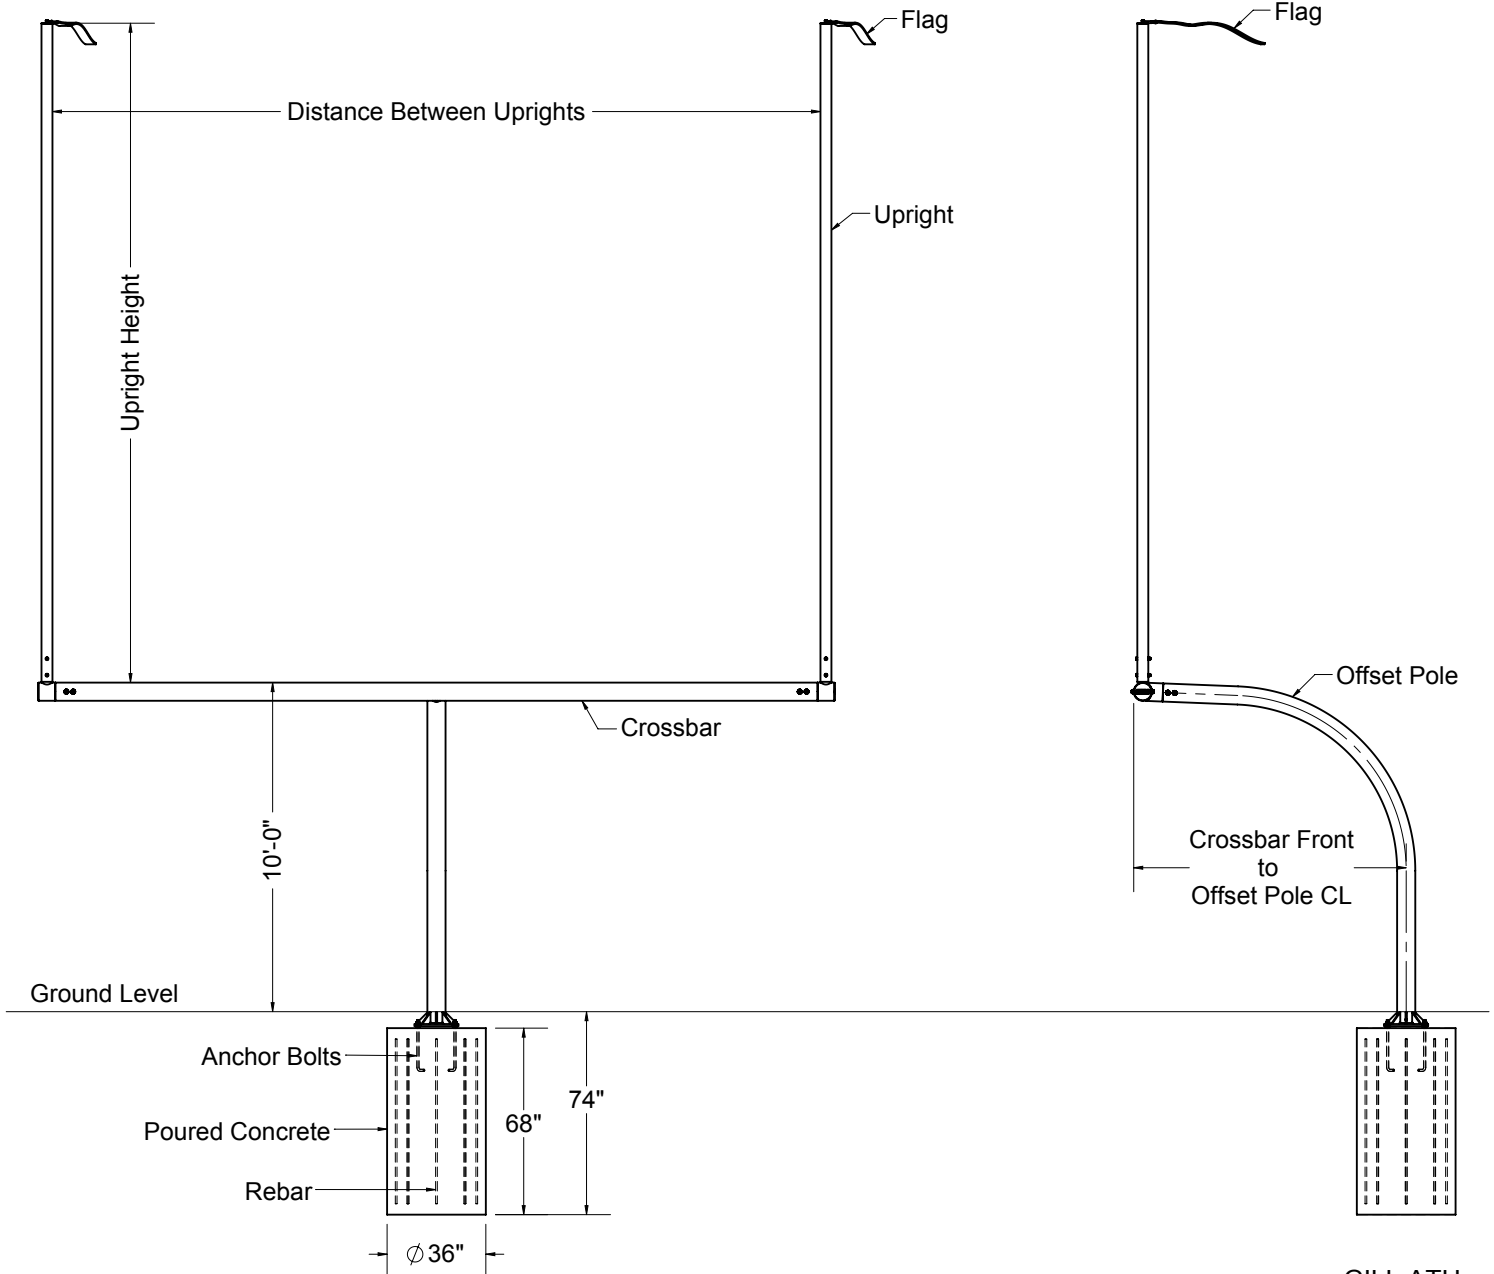



www.gillathletics.com
800-637-3090

ALUMINUM FOOTBALL GOALS PLATE MOUNTED SPECIFICATIONS

XX - Color Code

04 - White
18 - Optic Yellow

Aluminum Football Goal Specification Table

Part #	Crossbar Front to Offset Pole CL	Distance Between Uprights	Upright Height
FB26120CXX	6'-3 3/8"	23'-4"	20'
FB26130CXX	6'-3 3/8"	23'-4"	30'
FB26131CXX	6'-3 3/8"	23'-4"	Spliced 30'
FB26135CXX	6'-3 3/8"	23'-4"	Spliced 35'
FB26220CXX	6'-3 3/8"	18'-6"	20'
FB26230CXX	6'-3 3/8"	18'-6"	30'
FB26231CXX	6'-3 3/8"	18'-6"	Spliced 30'
FB26235CXX	6'-3 3/8"	18'-6"	Spliced 35'
FB28120CXX	8'-3 3/8"	23'-4"	20'
FB28130CXX	8'-3 3/8"	23'-4"	30'
FB28131CXX	8'-3 3/8"	23'-4"	Spliced 30'
FB28135CXX	8'-3 3/8"	23'-4"	Spliced 35'
FB28220CXX	8'-3 3/8"	18'-6"	20'
FB28230CXX	8'-3 3/8"	18'-6"	30'
FB28231CXX	8'-3 3/8"	18'-6"	Spliced 30'
FB28235CXX	8'-3 3/8"	18'-6"	Spliced 35'

F35550 - Plate Mounting Kit (sold individually)

F304 - Access Frame Kit (sold individually)

F302 - Football Goal Post Pads (sold in pairs)